


## Troubleshooting

Issue	Verify that ...	Preventive action
No projection	<ol style="list-style-type: none"> <li>1. The PC has detected the USB Projector.</li> <li>2. That LT71 logo is displayed.</li> <li>3. That USB Projector (Off) is not selected.</li> </ol>	<ol style="list-style-type: none"> <li>1. Make sure all three connectors are properly inserted.</li> <li>2. Make sure two USB ports are used on the PC.</li> <li>3. Select any other mode than USB Projector (Off).</li> </ol>
Projector restarts	Both USB connectors are properly inserted into your PC's USB sockets.	Insert the both USB connectors into two of the PC's USB sockets. Replace cable.

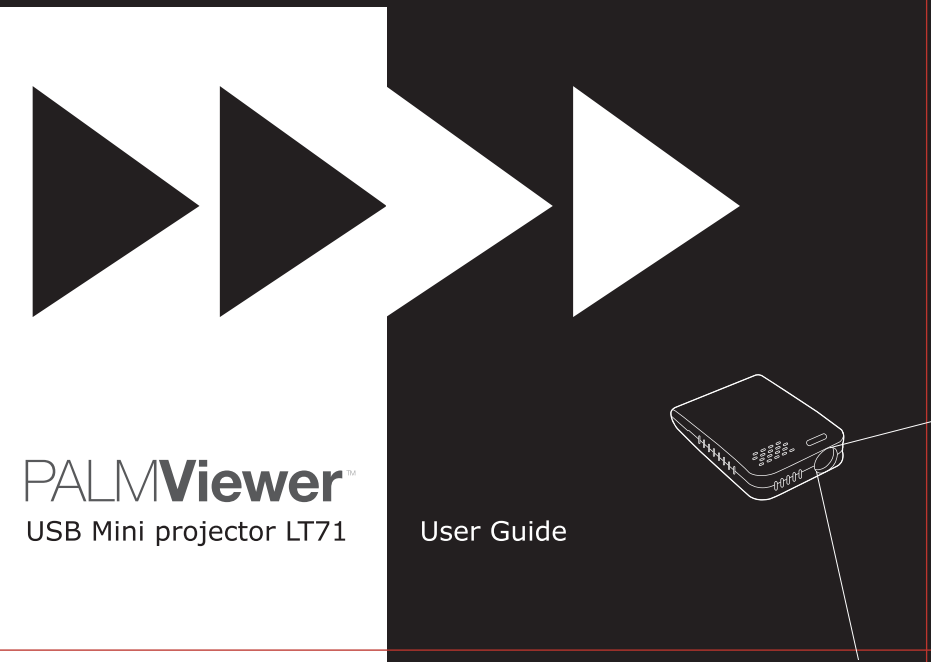

- 12 -

## Content

Content	2
Important Safety Advice	3
Packaging and Accessories	4
Product Introduction	5
Palmviewer LT71 Product Specifications	6
Screen Size and Projection Distance	7
Driver Installation	8
Operating Instructions	9
'Mirror' mode	9
'Extended' mode	9
'Primary' mode	10
'Off' mode	10
Trademarks and Notices	11
Product Certification and Safety Statement	11
Troubleshooting	12

- 2 -

## Trademarks and Notices

This document is published by Volter LTD, HK without any warranty. The information in this document may change without notice due to typographical errors, inaccurate information, and improvements to programs and/or equipment. Facts and features may vary depending on local variant. Kit contents and colour options may differ from market to market. PalmViewer is the registered trademark of YoYoMotion AB. Other product and company names mentioned herein may be the trademarks of their respective owners. Any rights not expressly granted herein are reserved.

## Product Certification and Safety Statement

The LT71 is FCC, 3C and CE certified.

Do not throw the appliance away with the normal household waste at the end of its life, but recycle it at an official collection point. By doing so, you can help to protect the environment.



- 11 -

## 'Primary' mode

Right-click the USB Projector icon and select USB Projector (Primary). You may also use the hotkey Ctrl+F5.

In this mode the display of your PC will be turned off and only the Projector will be active.

## 'Off' mode

Right-click the USB Projector icon and select USB Projector (Off). You may also use the hotkey Ctrl+F9.

In this mode the Projector will be turned off.

## Important Safety Advice

- Make sure no ventilation exits are blocked and that ventilation conditions are good, especially if the projector stays in operation for long time.
- Do not let the projector get wet, as this could cause a short circuit and damage it. Relative humidity may not exceed 90%.
- Surrounding temperature should stay between 0°C and 50°C. The projector should never get close to heat sources such as radiators, heaters etc.
- Do not strike or drop the projector.
- Keep the projector clean with a dry cloth and avoid dusty and dirty environments.
- Do not disassemble the projector.

- 10 -

- 3 -

## Packaging and Accessories

Please verify the contents of the package. The following items should be included:

o	USB Mini Projector Palmviewer LT71	1 unit
o	Dual USB Connection Cable	1 unit
o	Tripod	1 unit
o	User Guide (this one)	1 unit
o	Mini CD-ROM	1 unit

- 4 -

## Operating Instructions

1. Insert both connectors of the dual USB Connection Cable into the USB ports of your PC.
2. Insert the mini USB connector at the other end of the dual USB Connection Cable to the LT71 Projector.
3. The USB Projector Icon is displayed in the Windows notification area located in the lower right-hand corner of the PC screen, by the clock.
4. Right-click the USB Projector icon to select the projection mode.

## 'Mirror' mode

Right-click the USB Projector icon and select USB Projector (Mirror). You may also use the hotkey Ctrl+F7.

In this mode both the display of your PC and the projector will show identical images.

## 'Extended' mode

Right-click the USB Projector icon and select USB Projector (Extended). You may also use the hotkey Ctrl+F6.

In this mode individual windows can be moved over to the extended desktop displayed by the USB Projector.

- 9 -


## Driver Installation

The driver for PalmViewer LT71 supports Windows 2000, XP, Vista and Windows 7.

1. Insert the mini CD-ROM in the CD-ROM reader of your computer.
2. If the installation procedure does not start by itself then please locate the setup.exe file on the CD and double click on it.
3. Click on 'I Agree'
4. The driver will install automatically. During installation a blank screen may appear. This is normal behaviour.
5. It is advisable to restart the computer after installation

## Product Introduction

1. Projection Lens
2. Focus Ring
3. Fan ventilation exit
4. LED light (green). Status indicator.
5. Mini USB port
6. Screw hole for tripod

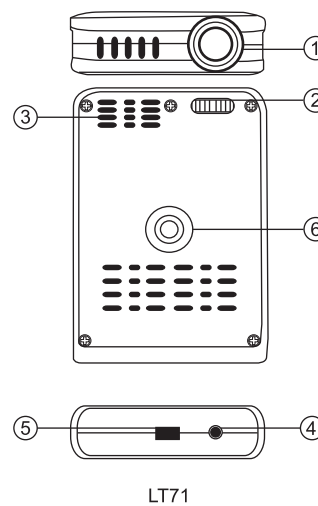

LT71

- 8 -


- 5 -

## Palmviewer LT71 Product Specifications

Light source:	White LED	Dimensions (wxdxh):	62x90x20 mm
Display technology:	LCoS	Weight:	80 g
LED lifetime:	20.000 hours	Connectivity:	USB 2.0 (power & video)
Brightness:	10 lumen	Power source:	USB, no battery
Resolution:	VGA 640 x 480	Operating temp.:	0-50°C
Colour:	24-bit RGB	System requirements:	Win 2000, XP, Vista, Win 7 CPU: ≥Pentium4 1.5GHz RAM: ≥ 512MB USB: 2xUSB 2.0 ports
Frame rate:	50/60 Hz		
Aspect ratio:	4:3		
Focus:	Manual focus		

- 6 -

## Screen Size and Projection Distance

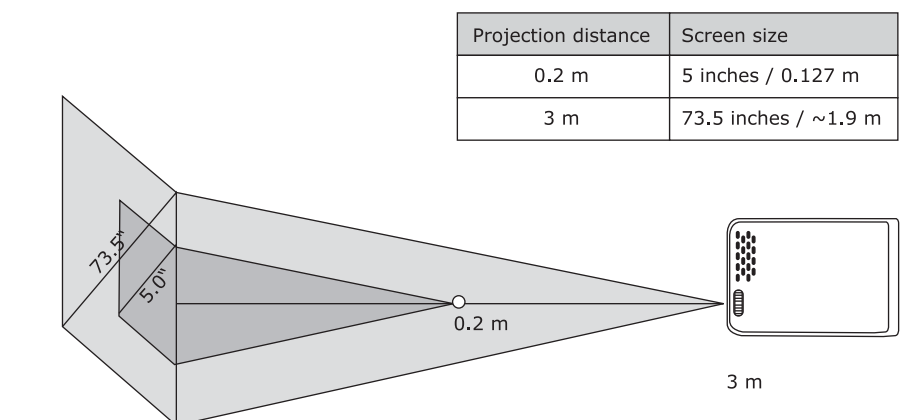

- 7 -